

XAP125CM



XAP125CM

Continuous Asphalt Mixing Plant


XAP125CM Continuous Asphalt mixing plant is an international advanced product developed independently by XCMG for producing asphalt mixture. Adopting continuous belt measurement, continuous mixing pot mixing process, frame structure, no foundation installation required, fully meet the requirements of projects on classified road, municipal road and freight yard.

Performance and characteristics

- The batching machine is equipped with variable frequency speed regulation, weighing sensors, and precise supply of aggregates.
- The hopper are equipped with grids for removing oversized materials to prevent them from entering the drum and causing damage to the equipment.
- The cold material feeding system is equipped with an emergency stop device, the sand hopper is equipped with a vibration arch breaking device, and the aggregate is equipped with tensioning, self-cleaning, and anti-deviation devices.
- Negative pressure closed-loop control, automatic adjustment, automatic control of aggregate temperature.
- The drum is made of heat-resistant and wear-resistant manganese steel, which has minimal deformation when heated and is durable; Aluminum silicate cotton (non-toxic and pollution-free) insulation, covered with stainless steel plate.

Dimension in working configuration

Unit: mm

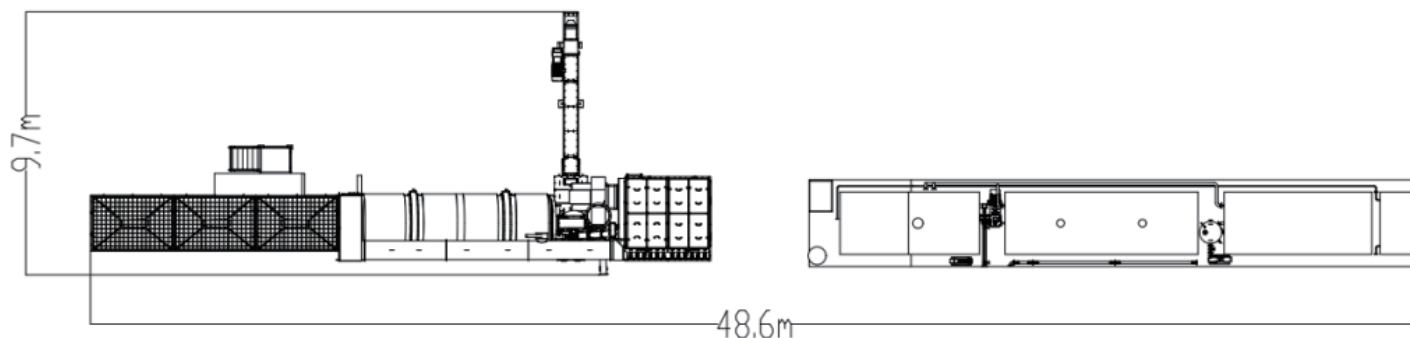

Main specifications

Item		Unit	Parameter	
Whole machine	Rated productivity	t/h	120	
	Required operating power	kW	274	
	Maximum single unit power	kW	55	
	Minimum installation area	m ²	527	

Item		Unit	Spec.	Q'ty
Cold hopper	Single hopper capacity	m ³	7.0	3set
	Loading height	m	2.8	
	Loading width	m	4.1	
	Arch-breaking device	-	Vibrating type of arch breaking	1set

Notes:

Specifications and configurations may vary depending on options and regional regulations. XCMG reserves the right to make changes to specifications without prior notice.