



SOLID
TO SUCCEED



SCISSOR LIFT XG0808AC

Standard configuration

Work Area

- Withdrawable Platform Extension With Position Lock
- Lanyard Attach Points
- Self-Locking Half-Height Swing Gate And Folding Guardrail

Drive

- Front-Wheel Drive

Performance

- Travel Driven By AC Motor
- Full Proportion Travel And Lift Control
- 25 % Gradeability

Power

- DC Maintenance-Free Battery

Applicability

- Lubrication-Free Bearing
- Swing-Out Component Tray
- Brake Release For Towing

Safe

- Emergency Stop Devices On Platform And Ground Controls
- Anti-Slipping Metal Platform
- Load Sensing Alarm System
- Descent Alarm
- 3-Second Descent Delay
- Multi-Axis Tilt Sensor
- Multi-Disc Brake
- Boom Maintenance Lock
- Auto Brake System
- Pothole Protection Device
- Fault Diagnosis System
- Electric Horn
- Automatic Speed Reduction At Height
- Charging Protection System

Other Features

- Removable Platform Control
- Intelligent Charger
- Hourmeter
- Side Fork Pockets
- Flashing Indicator Light
- User-Friendly Control System
- Platform Control With Battery Level Display
- Manual Platform Descent Valve
- Tilt Sensor And Audio Alarm



Working height
7.8/7.8 meters



Lift capacity
230Kg



Electric
power



Optional configuration

- Platform Searchlight
- Platform External Power Supply
- Air Line
- Platform Fire Extinguisher
- Platform Foot Pedal

XCMG FIRE-FIGHTING SAFETY EQUIPMENT CO., LTD

No.17 Zhujiang East Road, Hi-Tech Development Zone, Xuzhou, Jiangsu, China
mewp@xcmg.com

XG0808AC





SOLID
TO SUCCEED


Scissor Lift-Electric

Item	Metric	
Dimension		
Max. Working Height (Indoor/Outdoor)	7.8/7.8m	
Max. Platform Height (Indoor/Outdoor)	5.8/5.8m	
Min. Platform Height	1.05m	
Max. Platform Drive Height	5.8m	
Overall Length (Without Ladder/Outriggers)	1900(1680)mm	
Overall Width	810mm	
Overall Height (Platform Folded)	2160(1830)mm	
Platform Length	1670mm	
Platform Width	740mm	
Platform Extension Length	900mm	
Wheelbase	1360mm	
Min. Ground Clearance (Pothole Protection Deployed/Undeployed)	20/65mm	
Tire Size	φ323mm×100mm	
Performance		
Rated Load	230kg	
Load On Platform Extension	115kg	
Max. Platform Occupancy (Indoor/Outdoor)	2/1	
Max. Driving Speed (Stowed)	4.5km/h	
Max. Driving Speed (Raised)	0.8km/h	
Max. Gradeability	25%	
Min. Turning Radius (Inside)	0m	
Min. Turning Radius (Outside)	1.75m	
Platform Raising Time	15-25s	
Platform Lowering Time	25-35s	
Max. Working Slope (Side To Side/Front And Rear)	1.5°/3°	
Tire Ground Pressure	6.23kg/cm²	
Driving Wheels	2	
Braking Wheels	2	
Steering Wheels	2	
Power Source	Maintenance-free lead-acid batteries	Lithium batteries
Battery Voltage	24V	25.76V
Battery Capacity (3HR)	200Ah	150Ah
Battery Charger	24/36V/A	24/36V/A
Traveling Motor	0.5/15kW/V	0.5/15kW/V
Lifting Motor	3.3/24kW/V	3.3/24kW/V
Hydraulic Oil Capacity		
Hydraulic Tank Capacity	8L	
Weight		
Machine Weight	1580kg	

Trans

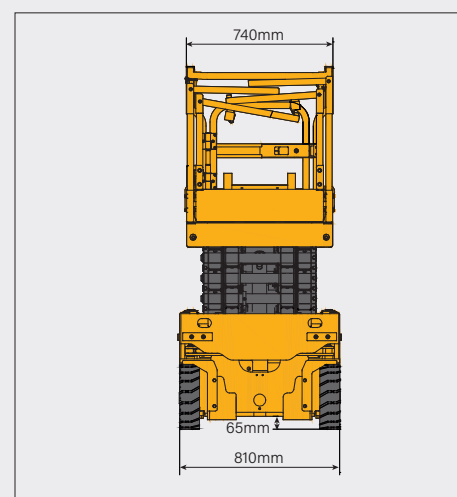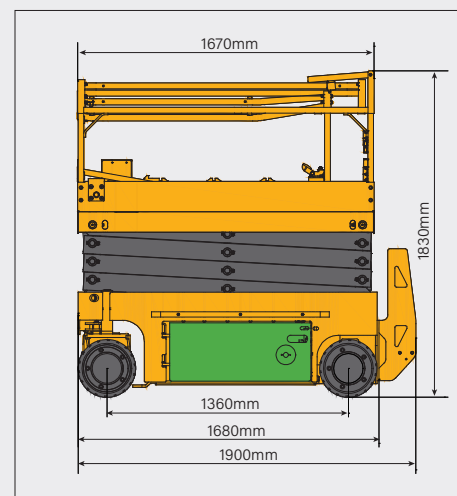

Platform Extd

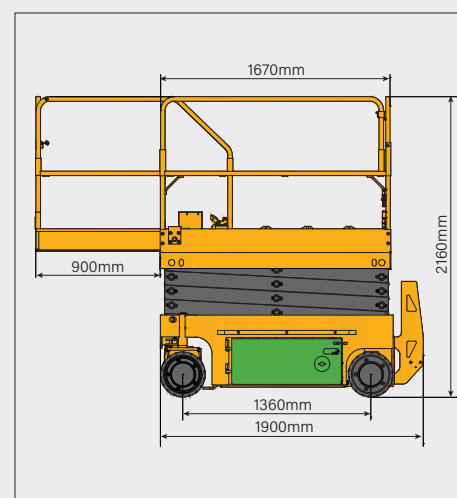

The print does not belong to the contract, nor a part of the commercial contract. We reserve the right to revise the product model, parameters, configuration based on the continuous improvement requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product. The final interpretation rights belong to XCMG.