

XC1000S



XC1000S

Stabilized Soil Mixing Plant


XC1000S Stabilized soil mixing plant is a product developed by XCMG based on its mature technologies, is an advanced level products in contemporary China. This equipment can produce cement, lime and other mixtures at all levels, fully meet the requirement of construction in expressway, classified highway, municipal administration path, airports, dams, freight yard and other projects.

Performance and characteristics

- The working conditions related to the maximum productivity 1000t/h:
- Produce cement stabilized soil, with a moisture content of $\leq 5\%$ for each grade of aggregate;
- Ambient temperature: $20^{\circ}\text{C} \pm 5^{\circ}\text{C}$;
- Relative humidity: no higher than 85%;
- The grading meets the relevant requirements specified in the Technical Guidelines for Construction of Highway Roadbases (JTG/T F20-2015).
- Factors affecting the maximum production rate of the equipment, which is 1000t/h:
- The surrounding atmospheric temperature, humidity, altitude ($\geq 1000\text{m}$), etc. have a certain impact on productivity;
- Materials with high viscosity such as mountain soil, clay, and lime; Soil content of aggregate at all levels ($\geq 2\%$); Cement content ($\geq 6\%$) will have a significant impact on productivity.

Dimension in working configuration

Unit: mm

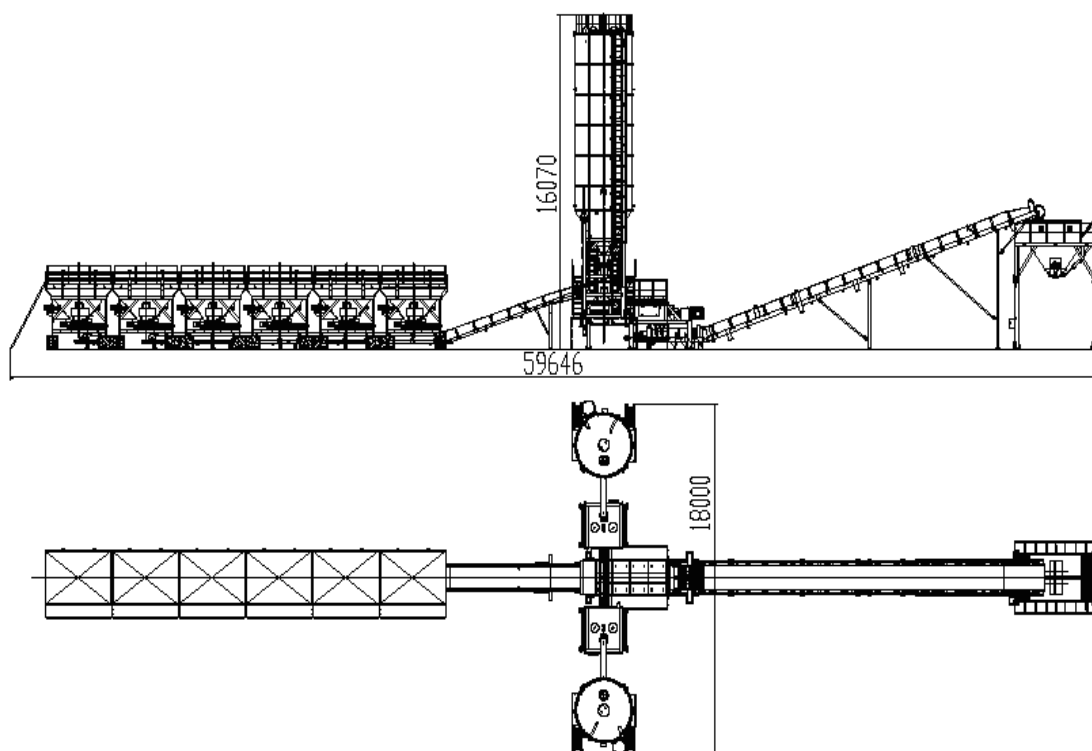

Main specifications

Indicator		Unit	Design value
Rated productivity		t/h	1000
Batching accuracy	Aggregate	%	± 1.5
	Powder	%	± 0.8
	Water	%	± 1
Total installed power		kW	369
Max. single power		kW	75
Area		m ²	64×18
Allowable aggregate size		mm	Less than 60
Installation layout		-	Modular combination (Modular)
Speed adjustment		-	Frequency control

Notes:

Specifications and configurations may vary depending on options and regional regulations. XCMG reserves the right to make changes to specifications without prior notice.



XCMG ROAD MACHINERY BUSINESS
Email: road.marketing@xcmg.com



Official Website



Facebook



Youtube