XLQ1005



XLQ1005

Vacuum Road Sweeper

Its versatile application includes cleaning work after milling and planing, paving, synchronous chip sealing, slurry sealing and cleaning work of municipal roads, mixing plant, coal mine, cement factory and other factories.

XLQ1005 Wet&Dry Vacuum Road Sweeper has characteristics of high cleaning efficiency, environmental protection, simple operation, good construction quality and high reliability.

XLQ1005


Vacuum Road Sweeper

Performance and characteristics

- The whole machine is equipped with wet and dry switching function, wet and dry channels are automatically separated without manual assistance, and will not contaminate the filter element. Dry cleaning and wet cleaning can be realized according to the working conditions
- The chassis adopts Sinotruk ZZ5168K4710C1, equipped with engine take-off, without starting the top engine can realize the whole machine unloading.
- The chassis and the top-mounted share the same chassis fuel tank, with a volume of 280L, large volume, and long continuous operation time.
- The lifting adopting multi-stage oil cylinder front type is safe and reliable; it falls by its own weight and will not damage the safety support caused by wrong operation.
- There are openable doors in the left side, end and top of the silo, which are convenient for maintenance.
- Both sides of the silo are made by contour plate with high structural strength and good pressure resistance.

Main Dimensions

Unit: mm

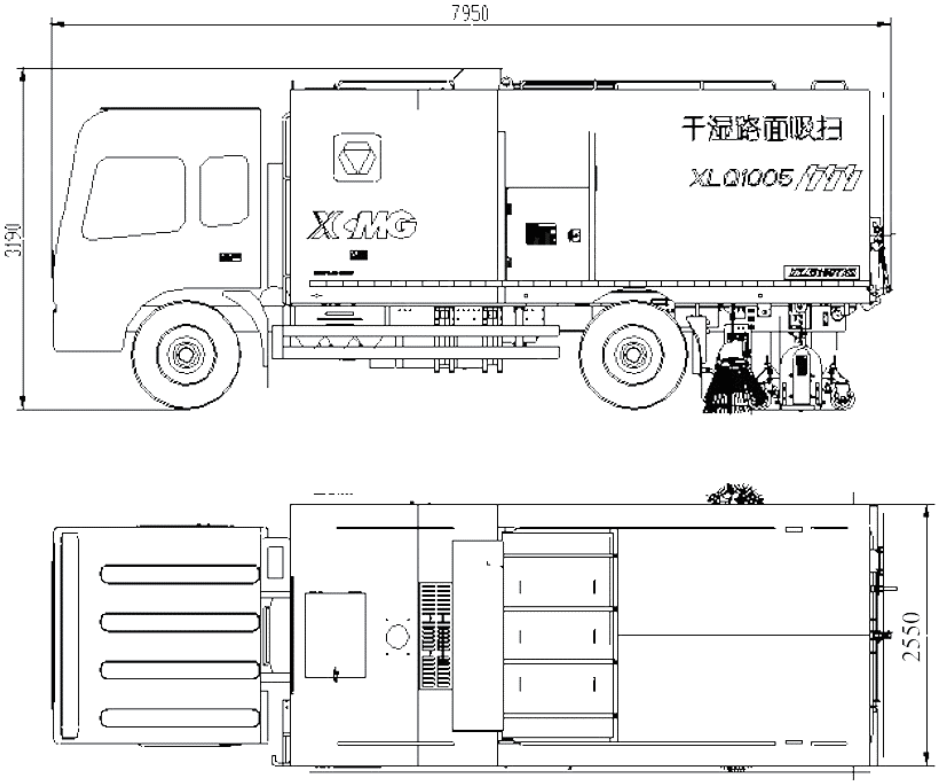

Main specifications

Item	Content	Unit	XLQ1005E
Performance Parameters	Filler silo capacity	m3	10(Effective ≥4)
	Water tank	m3	3
	Sweeping width (with/without side brush)	mm	2650/2300
	Minimum working speed	km/h	≤2.5
Chassis performance parameter	Model	-	ZZ5168K4710C1
	Engine type	-	YC6J220-33
	Engine power	kW/r/min	162/2500
	Maximum Travel Speed	km/h	88
Dimensional parameters	Overall dimensions (L*W*H)	mm	7950×2550×3190
Top mounting dynamic parameters	Model	-	YC140
	Engine power	kW/r/min	103/2200
Weights	Fuel tank	L	280
	Curb weight	kg	11200
	Total weight	kg	16000

Notes:
Specifications and configurations may vary depending on options and regional regulations. XCMG reserves the right to make changes to specifications without prior notice.

XCMG ROAD MACHINERY BUSINESS
Email: road.marketing@xcmg.com

Offical Website Facebook Youtube