

XGY1300D



XGY1300D

Single Cylinder Cone Crusher




XGY1300D is a large-sized single cylinder cone crusher, which is independently developed by XCMG based on years of experience in research and development of machinery. This cone crusher is more stable, more efficient and more intelligent, and as the second-step and third-step crushing equipment in material machining, it is widely applied in mining, water engineering, metallurgy and building material industries.

Performance and characteristics

- Crusher has a load detection technology and discharge opening has automatic setting, accurate positioning and automatic aligning functions.
- With a deep cavity design, materials can fall more rapidly into the steep crushing chamber by gravity, which increases material processing capacity.
- The application of constant crushing chamber structure makes lining plate and chamber shape remain unchanged during its lifespan, which keeps allowed max. feedstock grain size and production capacity constant.
- The design of high swinging frequency and small eccentric distance can increase crushing times in unit time and improve crushing efficiency.
- Discharge opening is automatically adjustable, can always remain unchanged, so that the chamber is always filled up, which can truly realize "laminated" crushing and gain more satisfying size of grain and better crushing effect.
- Based on a design concept of an anti-toss, anti-wear, anti-drop and anti-leak structure, materials with a larger size are allowed in, so that hopper achieves more continuous production.

Dimension in working configuration

Unit: mm

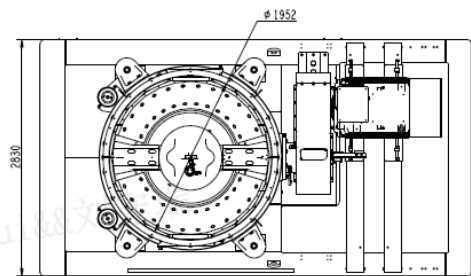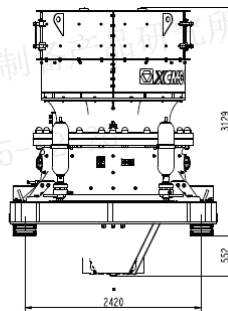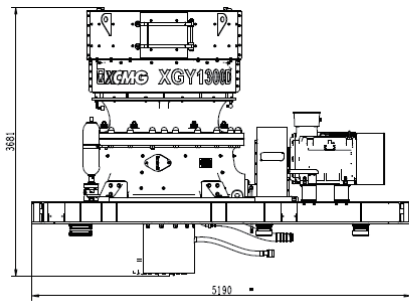

Item		Unit	Parameter
Overall Machine Parameters	Max. feedstock size	mm	321
	Range of discharge opening	mm	8~51
	Handling capacity	t/h	110~662
	Driving type	-	Belt drive
	Motor power	kW	315
	Horizontal shaft speed	rpm	1490±5
	Horizontal shaft rotation	-	Counterclockwise (seen from outside)
	Eccentric bushing rotation	-	Clockwise (seen from top)
	Working environment temperature	°C	-20~+40
	Type of eccentric bushing	-	(18、20、24、28)、(28、32、36、40)、(40、44、48、50)
	Chamber type	-	EC、CX、C、MC、M、MF、F、EF
	Overall weight	kg	34710
	Overall dimensions (L×W×H) (oil station and cabinet are not included)	mm	5190×2830×3681
	Gear type	-	Klinberg
Hydraulic cylinder assembly	Inner diameter of oil cylinder	mm	520
	Oil cylinder stroke	mm	280
	Material of cylinder block	-	G28Mn6+N
	Displacement sensor	-	Standard
Drive system	Driving type	-	Motor+V-belt drive
	Motor power	kW	315
	Rated voltage of motor	V	380
	Rated rotation speed of motor	rpm	1490±5
	Base seat dimensions (L×W×H)	mm	3170×2750×260
	Shock absorber	-	6
Feed hopper	Size (OD×H)	mm	∅2300×1250
	Volume	m³	5.2
	Type of wear plate	-	Rubber liner
	Wear plate mounting type	-	Bolt connection
	Access door	-	Two access doors are arranged symmetrically
Hydraulic system	Hydraulic oil tank volume	L	200
	Pump	-	Screw pump
	Pump displacement	-	25L/min(50Hz)
	Number of oil filter element	-	1
	Pump motor power	kW	7.5
Main Lubrication System	Fuel tank capacity	L	500
	Pump design	-	Screw pump
	Pump displacement	-	130L/min(50Hz)
	Pump motor power	kW	7.5
	Number of oil filter element	-	6
	Filter element plugged sensor	-	Differential pressure sensor
	Number of fuel heater	-	4
	Fuel heater power	kW	1.66-2.22
Horizontal shaft lubrication system	Diesel tank volume	L	80L
	Pump design	-	Gear pump
	Pump displacement	-	0.7L/min(50Hz)
	Pump motor power	-	0.25kW(50Hz)
	Number of oil filter element	-	1
Dust removal system	Type	-	Over-pressure air system
	Air input	-	Blower
	Air flow	m³/min	>0.3
	Air pressure	Pa	>600

Notes:

Specifications and configurations may vary depending on options and regional regulations. XCMG reserves the right to make changes to specifications without prior notice.

