XCMG | SOLID TO SUCCEED

CE

SCISSOR LIFT
XG1008AC

Standard configuration

Work Area
- Withdrawable Platform Extension With Position Lock
- Lanyard Attach Points
- Self-Locking Half-Height Swing Gate And Folding Guardrail

Drive
- Front-Wheel Drive

Performance
- Travel Driven By AC Motor
- Full Proportion Travel And Lift Control
- 25 % Gradeability

Power
- DC Maintenance-Free Battery

Applicability
- Lubrication-Free Bearing
- Swing-Out Component Tray
- Brake Release For Towing

Safe
- Emergency Stop Devices On Platform And Ground Controls
- Anti-Slipping Metal Platform
- Load Sensing Alarm System
- Descent Alarm
- 3-Second Descent Delay
- Multi-Axis Tilt Sensor
- Multi-Disc Brake
- Boom Maintenance Lock
- Auto Brake System
- Pothole Protection Device
- Fault Diagnosis System
- Electric Horn
- Automatic Speed Reduction At Height
- Charging Protection System

Other Features
- Removable Platform Control
- Intelligent Charger
- Hourmeter
- Side Fork Pockets
- Flashing Indicator Light
- User-Friendly Control System
- Platform Control With Battery Level Display
- Manual Platform Descent Valve
- Tilt Sensor And Audio Alarm



Working height
10/7.5 meters

Lift capacity
230Kg

Electric
power



Optional configuration

- Platform Searchlight
- Platform External Power Supply
- Air Line
- Platform Fire Extinguisher
- Platform Foot Pedal

XCMG FIRE-FIGHTING SAFETY EQUIPMENT CO., LTD

No.17 Zhujiang East Road, Hi-Tech Development Zone, Xuzhou, Jiangsu, China
mewp@xcmg.com


XG1008AC


XCMG SOLID TO SUCCEED

Scissor Lift-Electric


Item	Metric	
Dimension		
Max. Working Height (Indoor/Outdoor)	10/7.5m	
Max. Platform Height (Indoor/Outdoor)	8/5.5m	
Min. Platform Height	1.2m	
Max. Platform Drive Height	8m	
Overall Length (Without Ladder/Outriggers)	2477(2267)mm	
Overall Width	810mm	
Overall Height (Platform Folded)	2350(1985)mm	
Platform Length	2280mm	
Platform Width	810mm	
Platform Extension Length	900mm	
Wheelbase	1877mm	
Min. Ground Clearance (Pothole Protection Deployed/Undeployed)	20/100mm	
Tire Size	φ381mm×127mm	
Performance		
Rated Load	230kg	
Load On Platform Extension	115kg	
Max. Platform Occupancy (Indoor/Outdoor)	2/1	
Max. Driving Speed (Stowed)	4km/h	
Max. Driving Speed (Raised)	0.8km/h	
Max. Gradeability	25%	
Min. Turning Radius (Inside)	0m	
Min. Turning Radius (Outside)	2.3m	
Platform Raising Time	29-40s	
Platform Lowering Time	34-52s	
Max. Working Slope (Side To Side/Front And Rear)	1.5°/3°	
Tire Ground Pressure	6.23kg/cm²	
Driving Wheels	2	
Braking Wheels	2	
Steering Wheels	2	
Power Source	**Maintenance-free lead-acid batteries**	**Lithium batteries**
Battery Voltage	24V	25.76V
Battery Capacity (3HR)	200Ah	200Ah
Battery Charger	24/36V/A	24/36 V/A
Traveling Motor	0.87/15kW/V	0.87/15kW/V
Lifting Motor	3.3/24kW/V	3.3/24kW/V
Hydraulic Oil Capacity		
Hydraulic Tank Capacity	22L	
Weight		
Machine Weight	2220kg	

Trans

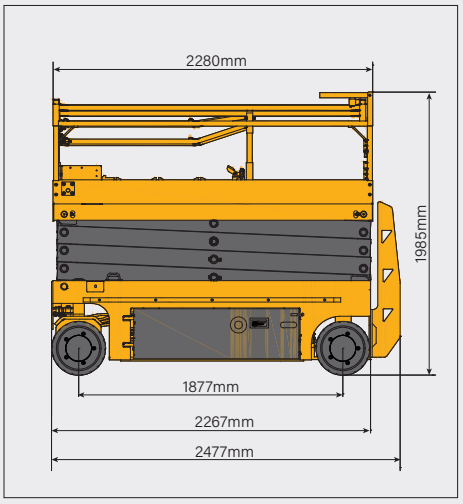

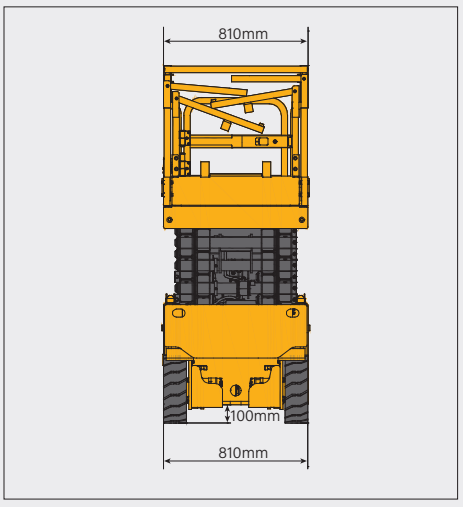

Platform Extd

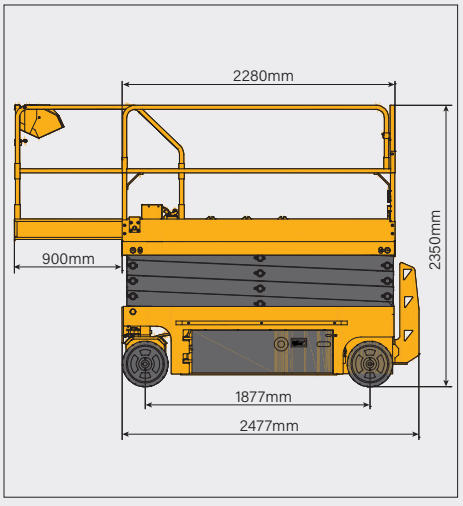

The print does not belong to the contract, nor a part of the commercial contract.We reserve the right to revise the product model, parameters, configuration based on the continuous improvment requirements of the product, without prior notice.Pictures are for reference only, and the specific product shall depend on the real product.The final interpretation rights belong to XCMG.