XCMG | SOLID TO SUCCEED

SCISSOR LIFT
XG2239C

Standard Configuration

- Withdrawable Platform Extension With Position Lock
- Lanyard Attach Points
- Self-Locking Half-Height Swing Gate And Folding Guardrail
- Rear-Wheel Drive
- Travel Driven By AC Motor
- Full Proportion Travel And Lift Control
- 30 % Gradeability
- DC Maintenance-Free Battery
- Lubrication-Free Bearing
- Brake Release For Towing
- Emergency Stop Devices On Platform And Ground Controls
- Anti-Slipping Metal Platform
- Load Sensing Alarm System
- Descent Alarm
- 3-Second Descent Delay
- Multi-Axis Tilt Sensor
- Boom Maintenance Lock
- Auto Brake System
- Fault Diagnosis System
- Electric Horn
- No Traveling With Platform Elevated
- Charging Protection System
- Removable Platform Control
- Intelligent Charger
- Hourmeter
- Side Forklift Pockets For Transportation
- Flashing Indicator Light
- User-Friendly Control System
- Platform Control With Battery Level Display
- Manual Platform Descent Valve
- Tilt Sensor And Audio Alarm
- White Rubber Track

Optional configuration

- Platform Searchlight
- Platform External Power Supply
- Air Line
- Platform Fire Extinguisher
- Platform Foot Pedal
- Black Rubber Track

Working height
8.8 meters

Lift capacity
250Kg

Electric
power



XCMG FIRE-FIGHTING SAFETY EQUIPMENT CO., LTD

No.17 Zhujiang East Road, Hi-Tech Development Zone, Xuzhou, Jiangsu, China
mewp@xcmg.com


XG2239C


XCMG SOLID TO SUCCEED

Scissor Lift-Electric


Item	Metric	Imperial
Dimensions		
Max. Working Height (Indoor/Outdoor)	8.8/0m	28ft 10in/0
Max. Platform Height (Indoor/Outdoor)	6.8/0m	22ft 4in/0
Min. Platform Height	1.1m	3ft 7in
Max. Platform Drive Height	1.1m	3ft 7in
Overall Length (Without Ladder/Outriggers)	2135(2001)mm	7 ft(6ft 7in)
Overall Width	990mm	3ft 3in
Overall Height (Platform Folded)	2234(1699)mm	7ft 4in(5ft 7in)
Platform Length	1938mm	6ft 4in
Platform Width	950mm	3ft 1in
Platform Extension Length	900mm	2ft 11in
Min. Ground Clearance	86mm	3in
Track Dimension	T200×72K×59	
Performance		
Rated Load	250kg	551.2lbs
Load On Platform Extension	115kg	253.5lbs
Max. Platform Occupancy (Indoor/Outdoor)	2/0	
Max. Driving Speed (Stowed)	2km/h	1.24mph
Max. Driving Speed (Raised)	0km/h	0mph
Max. Gradeability	30%	
Min. Turning Radius (Inside)	0m	0ft
Min. Turning Radius (Outside)	2.5m	8ft 2in
Platform Raising Time	25-34s	
Platform Lowering Time	29-38s	
Max. Working Slope (Side To Side/Front And Rear)	1.7°/2.0°	
Tire Ground Pressure	0.295 kgf/cm^2	4.20PSI
Driving Wheels	2	
Braking Wheels	2	
Steering Wheels	Zero-Turn Steering	
Power Source	**Maintenance-free lead-acid batteries**	
Battery Voltage	24V	
Battery Capacity (3HR)	200Ah	
Battery Charger	24/36V/A	
Traveling Motor	1.1/16kW/V	
Lifting Motor	2.2/24kW/V	
Hydraulic Oil Capacity		
Hydraulic Tank Capacity	10L	2.64gal
Weight		
Machine Weight	1700kg	3747.86lbs

Trans

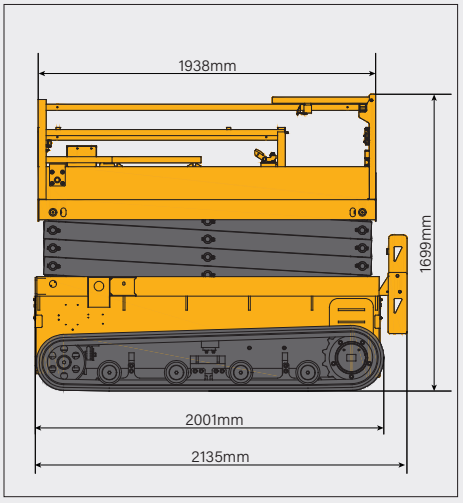

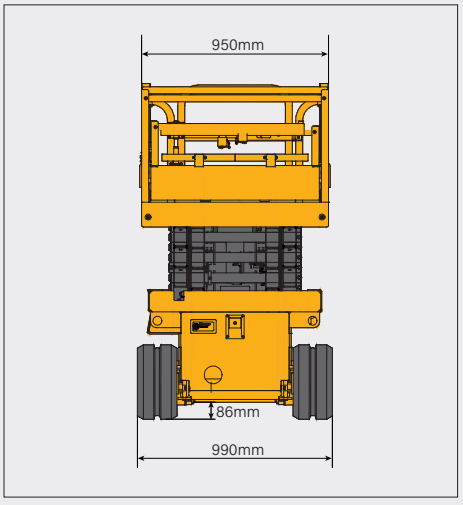

Platform Extd

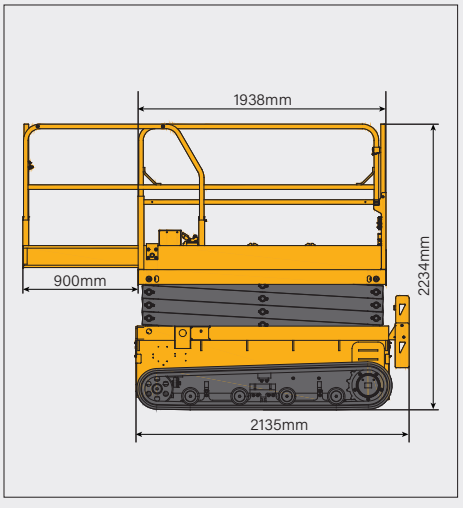

The print does not belong to the contract, nor a part of the commercial contract.We reserve the right to revise the product model, parameters, configuration based on the continuous improvment requirements of the product, without prior notice.Pictures are for reference only, and the specific product shall depend on the real product.The final interpretation rights belong to XCMG.