

XAP65

XAP65

Asphalt Mixing Plant


XAP65 Asphalt mixing plant is an international advanced product developed independently by XCMG for producing asphalt mixture, modified asphalt mixture, etc., fully meet the requirements of projects on classified road, municipal road and freight yard.

Performance and characteristics

- Variable frequency speed regulation of feeding machine, stepless speed control of aggregate feeding amount.
- The hopper and feeding belt conveyor are equipped with grids for removing oversized materials to prevent them from entering the drum and causing damage to the equipment.
- The cold material feeding system is equipped with an emergency stop device, the sand hopper is equipped with a vibration arch breaking device, and the aggregate and feeding belt conveyors are equipped with tensioning, self-cleaning, and anti-deviation devices.
- Waterfall type material curtain, heat exchange efficiency 92%.
- The drum is made of heat-resistant and wear-resistant manganese steel, which has minimal deformation when heated and is durable; Aluminum silicate cotton (non-toxic and pollution-free) insulation, covered with stainless steel plate.
- Anti wear structures are designed at both the receiving and discharging troughs, ensuring a long service life.

Dimension in working configuration

Unit: mm

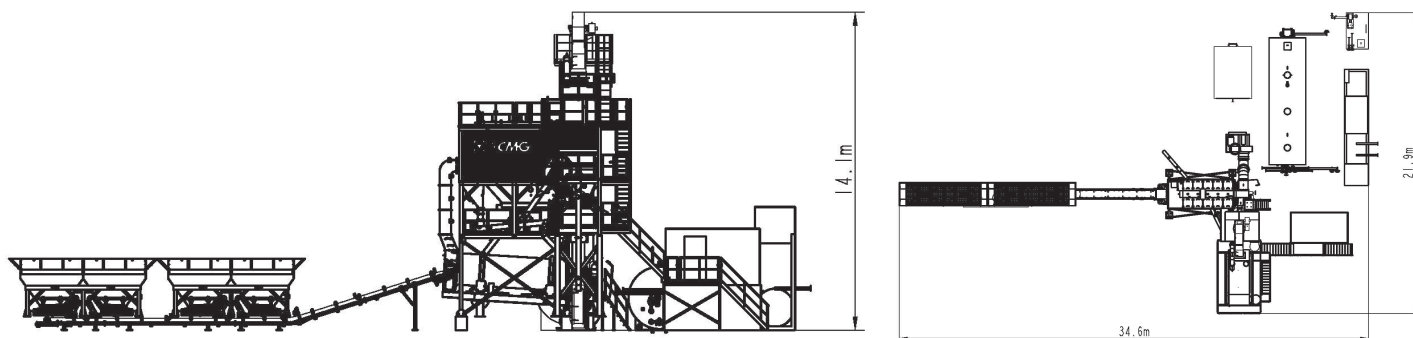

Main specifications

Item		Unit	Parameter	
Whole machine	Rated productivity	t/h	60	
	Nominal mixing capacity	kg/batch	800	
	Required operating power	kW	191	
	Maximum single unit power	kW	37	
	Minimum installation area	m ²	758 (34.6m×21.9m)	
Item		Unit	Spec.	Q'ty
Cold hopper	Single hopper capacity	m ³	6	4set
	Loading height	m	2.7	
	Loading width	m	3.2	
	Arch-breaking device	-	Vibrating type of arch breaking	1set

Notes:

Specifications and configurations may vary depending on options and regional regulations. XCMG reserves the right to make changes to specifications without prior notice.



XCMG ROAD MACHINERY BUSINESS
Email: road.marketing@xcmg.com



Official Website



Facebook



Youtube