

XCMG SOLID TO SUCCEED


TELEHANDLERS
XT12010K



LOAD CHART

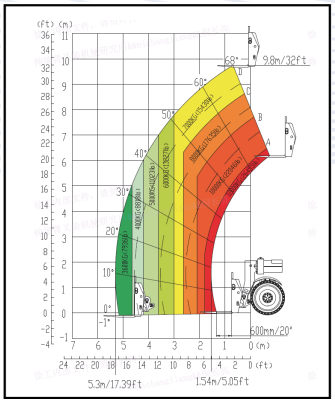

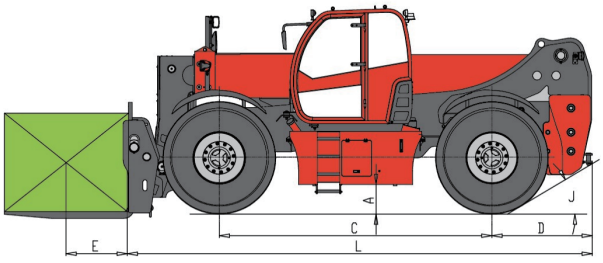

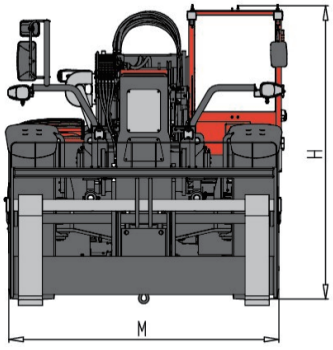

STATIC DIMENSION

Dimensions		Metric
Min. Ground Clearance	A	440mm
Front Overhang	B	—
Wheel Base	C	3600mm
Rear Overhang	D	1339mm
Load Center Distance	E	600mm
Overall Length	L	6330mm
Overall Height	H	3000mm
Overall Width	M	2500mm
Approach Angle	I	—
Departure Angle	J	33°

XT12010K

PARAMETER

Parameter	Metric
Dimension	
Overall Length	6330mm
Overall Width	2500mm
Overall Height	3000mm
Wheel Base	3600mm
Track Width	2050mm
Min. Ground Clearance	440mm
Fork Dimensions	1200×180×70mm
Weight and tires	
Machine Weight (With Fork)	19500 kg
Tire Specification	17.5 R25
Performance	
Rated Load	12000kg
Load Center Distance	600mm
Max. Lifting Height (To Upper Plane Of Forks)	9.8m
Lift Capacity At Max. Lifting Height	7000kg
Max. Outreach (Boom Being Horizontal, Load Center Distance To The Front End Of Tires)	5.3m
Lift Capacity At Max. Outreach	3600kg
Boom Lifting Time	≤23s
Boom Lowering Time	≤18s
Boom Extension Time	≤22s
Boom Retraction Time	≤20s
Fork Dump Time	≤10s
Fork Crowd Time	≤8s
Boom Lifting Range	-1°～68°
Fork Tilt Angle Range (Boom Being Horizontal)	-18°～117°
Max. Travel Speed	28 km/h
Max. Traction Force	≥97 kN
Min. Turning Radius	≤4430 mm
Frame Leveling Angle	±10°
Power System	
Power Source	Diesel Engine
Engine Brand/Model	Cummins QSF4.5
Number Of Cylinders	4
Engine Rated Power	125Kw
Emissions	Stage III
Rated Speed	2200r/min
Max. Torque @ Rpm	670N.m@1500RPM
Fuel Tank Capacity	340 L
Transmission System	
Numbers Of Gears (Forward/Reverse)	2/2
Transmission Type	Hydrostatic Transmission
Steer Mode	4-Wheel Steer
Drive Mode	4×4
Hydraulic System	
Hydraulic Pump Type	Plunger Pump
Hydraulic System Pressure	28Mpa
Hydraulic System Flow	150L/min
Hydraulic Tank Capacity	365 L

STANDARD CONFIGURATION

- **Cab**
- Air Conditioning
- Adjustable Steering Wheel
- 7-Inch Display
- Radio
- Bluetooth Call
- 24 V Power Outlet
- Cigarette Lighter
- Top Sun Visor
- Front Sun Visor
- Interior Rearview Mirror
- Reversing Camera
- Front Wiper
- Top Wiper
- Fire Extinguisher
- Revolving Alarm Light
- Adjustable Suspension Seat
- Steering Column Shift
- Reversing Buzzer
- Cup Holder
- Emergency Hammer
- Seat Belt Unfastened Detection Function
- Multifunctional Proportional Handle
- Emergency Stop Switch
- Horn
- **Power Transmission**
- 4-Wheel Drive
- 3 Steering Modes
- Front And Rear Axles Limited-Slip Differential
- Engine Inlet Heating
- Wet Brake System
- **Electrical System**
- Anti-Tilt System
- Working Envelope Display
- Working Load Display
- Boom-Mounted Work Light
- Cab Front And Rear Work Lights
- Seat Belt Unbuckled Alarm
- Three-Color Alarm Light
- **Hydraulic System**
- Open-Center Load Sensing System
- Boom Tip Damping System
- Automatic Fork Leveling
- **Others**
- Manual Towing Hook
- Safety Rod
- Manual Centralized Lubrication

OPTIONAL CONFIGURATION

- Falling Object Protective Structure
- Coolant Heating System
- Wheel-Nut Indicators

OPTIONAL ATTACHMENTS

- Fork (12t,1.8m)
- Bucket
- Hook