



SOLID
TO SUCCEED

ARTICULATED BOOM LIFT XGA26K2

Standard Configuration

Work Area

- Tri-Entry Platform

Power

- Cold Start Components
- Engine Intake Air Pre-Filter Assembly
- Engine Condition Monitoring And Start Protection Device

Drive

- 4-Wheel Drive
- Axle Oscillation

Safe

- Descent And Motion Alarm
- Tilt Alarm
- Horn With Adjustable Volume
- Emergency Stop Devices On Platform And Chassis
- Emergency Power Unit
- Axle Oscillation Pressure Detection System
- 4-Wheel Braking System

Other Features

- Automatic Leveling System
- Proportional Joystick Control
- Drive Enable
- Two-Speed Drive
- Telematics Front-End Interface
- Hostile Environment Package
- Thumb Rocker Steering
- Double-Load Amplitude Control
- Anti-Entrapment System



Working height
26.6 meters



Lift capacity
256/350Kg



Diesel
power



Optional configuration

- Gray Foam-Filled Tires (Φ1017mm×450mm)
- Tool Tray
- Platform Power
- Air Line
- Mechanical Anti-Entrapment Device
- Platform Height Limitation Anti-Collision Device
- Platform Half-Mesh
- Working Light Assembly
- Fall Arrest Assembly
- Platform Anti-Squeeze Auxiliary Rail
- Aircraft Protection Device
- Rubber Buffer Protection Device

XCMG FIRE-FIGHTING SAFETY EQUIPMENT CO., LTD

No.17 Zhujiang East Road, Hi-Tech Development Zone, Xuzhou, Jiangsu, China
mewp@xcmg.com

XGA26K2



SOLID
TO SUCCEED


Articulated Boom Lift-Engine Powered

Item	Metric	
Dimensions		
Overall Dimension - Stowed	Length	11760mm
	Width	2490mm
	Height	2950mm
Overall Dimension - Transported	Length	11100mm
	Width	2490mm
	Height	3000mm
Platform Dimensions	Length	2400mm
	Width	900mm
	Height	1150mm
Wheelbase		3000mm
Jib Length		1850mm
Min. Ground Clearance		380mm



Performance	
Max. Working Height	26.6m
Max. Platform Height	24.6m
Max. Outreach	19.5m
Max. Up And Over Clearance	8.7m
Max. Down Reach Depth	5.2m
Max. Lift Capacity	256/350kg
Max. Platform Occupancy	2/3
Max. Chassis Allowable Angle	X-4° / Y-4°
1St Boom Luffing Range	-1° ~ 70°
2Nd Boom Luffing Range	-35° ~ 68°
Fly Boom Luffing Range	-65° ~ 70°
Turntable Rotation	360°
Platform Rotation	160°
Machine Weight	18100kg
Driving Speed (Stowed)	5km/h
Driving Speed (Raised Or Extended)	0.6km/h
Min. Turning Radius (Inside/Outside)	2355mm/4625mm
Turntable Tailswing (Stowed)	2255mm
Turntable Tailswing (Working)	1330mm
Max. Gradeability (Counterweight Uphill)	45% (24°)

Power Source	
Control	12 V DC Proportional Control
Emergency Power Supply	12V/200Ah
Engine Model	Cummins QSF2.8
Engine Power / Rpm	53kW/(2200r/min)
Max. Engine Torque	270N · m/(1500-1800r/min)
Engine Emission Standard	Stage III
Hydraulic Oil Tank Capacity (Effective Volume)	135L
Fuel Tank Capacity	180L



Tire	
Tire Size	φ1017mm×450mm
Tire Ground Pressure	8.58kg/cm ²
Driving Wheels	4
Braking Wheels	4
Steering Wheels	4

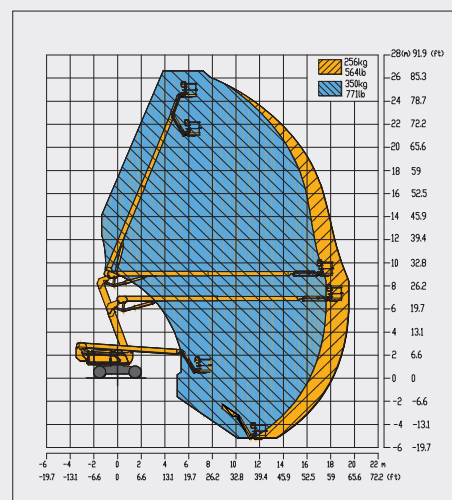

Stowed

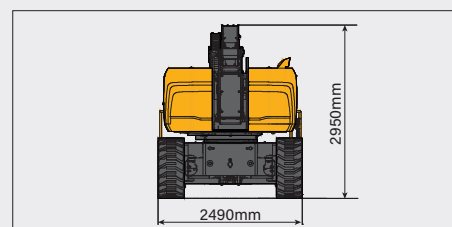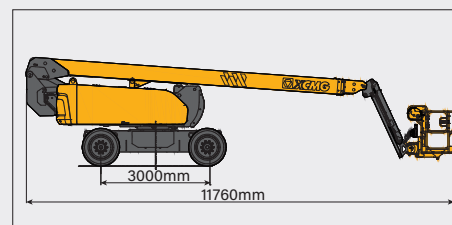

Trans

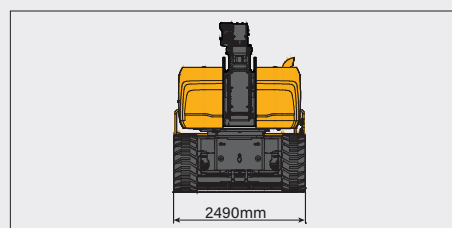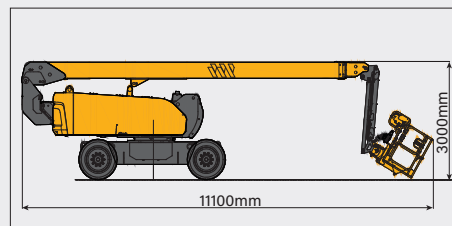

The print does not belong to the contract, nor a part of the commercial contract. We reserve the right to revise the product model, parameters, configuration based on the continuous improvement requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product. The final interpretation rights belong to XCMG.