

XCMG SOLID TO SUCCEED


# TELEHANDLERS
# XT4018E

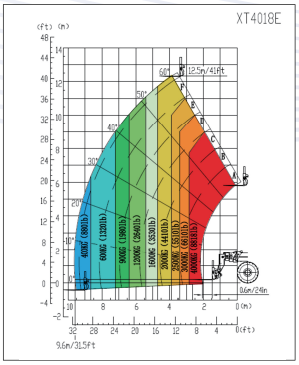


## LOAD CHART

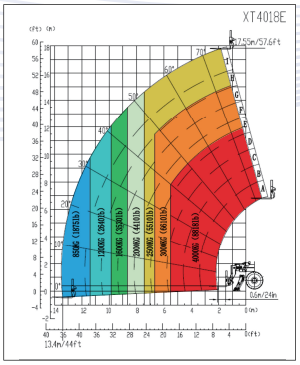


## STATIC DIMENSIONS
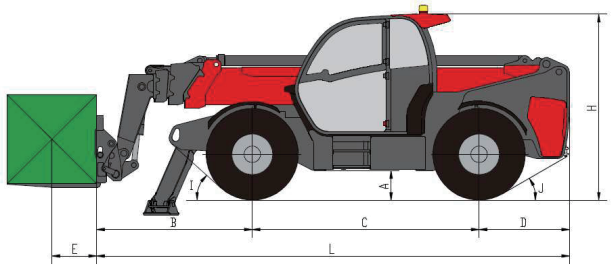
| Dimensions | | Metric |
|---|---|---|
| Min. Ground Clearance | A | 370mm |
| Front Overhang | B | 2010mm |
| Wheelbase | C | 3050mm |
| Rear Overhang | D | 1210mm |
| Load Center Distance | E | 600mm |
| Overall Length | L | 6270mm |
| Overall Height | H | 2480mm |
| Overall Width | M | 2320mm |
| Approach Angle | I | 40° |
| Departure Angle | J | 33° |

# XT4018E

## PARAMETERS

| Parameters | Metric |
|---|---|
| **Dimensions** | |
| Overall Length | 6270 mm |
| Overall Width | 2320 mm |
| Overall Height | 2480 mm |
| Wheel Base | 3050 mm |
| Track Width | 1920 mm |
| Min. Ground Clearance | 370 mm |
| Fork Dimensions | 1200×122×50 mm |
| **Weight And Tires** | |
| Machine Weight (With Fork) | 12500 kg |
| Tire Specification | 400/80-R24 |
| **Performance** | |
| Rated Load | 4000 kg |
| Load Center Distance | 600 mm |
| Max. Lifting Height (To Upper Plane Of Forks) | 17.55 m |
| Lift Capacity At Max. Lifting Height | 2500 kg |
| Max. Outreach (Boom Level, Load Center To Front Tire Face) | 13.4 m |
| Lift Capacity At Max. Outreach | 850 kg |
| Boom Lifting Time | ≤16 s |
| Boom Lowering Time | ≤18 s |
| Boom Extension Time | ≤18 s |
| Boom Retraction Time | ≤15 s |
| Fork Dump Time | ≤4 s |
| Fork Crowd Time | ≤4 s |
| Boom Lifting Range | -3°～72° |
| Fork Tilt Angle Range (Boom Being Horizontal) | -12°～114° |
| Max. Travel Speed | 28 km/h |
| Max. Traction Force | ≥60 kN |
| Min. Turning Radius | ≤3920 mm |
| Frame Leveling Angle | ±10° |
| **Power System** | |
| Travel Motor Power | 72kW |
| Operating Motor Power | 42kW |
| Battery Specification – Voltage | 608V |
| Battery Specification – Capacity | 173Ah |
| **Transmission System** | |
| Numbers Of Gears (Forward /Reverse) | 2/2 |
| Transmission Type | Motor drive |
| Steer Mode | 4-wheel steer |
| Drive Mode | 4×4 |
| **Hydraulic System** | |
| Hydraulic Pump Type | Plunger Pump |
| Hydraulic System Pressure | 28Mpa |
| Hydraulic System Flow | 150L/min |
| Hydraulic Tank Capacity（MAX Capacity） | 140L |

## STANDARD CONFIGURATION

- **Cab**
  - FOPS And ROPS Certification
  - Air Conditioning
  - 4-Way Adjustable Steering Column
  - 10" Main Display
  - 4.3" Sub Display
  - Radio
  - Bluetooth Call
  - 12 V Power Outlet
  - USB/Type-C Charging Port
  - Top Sun Visor
  - Front Sun Visor
  - Interior Rearview Mirror
  - Exterior Rearview Mirror
  - Reversing Camera
  - Front Wiper
  - Rear Wiper
  - Top Wiper
  - Rear Window Defroster
  - Fire Extinguisher
  - Dual-Rotating Alarm Light (Yellow+Yellow)
  - Air-Suspended Fabric Seat
  - Reversing Buzzer
  - Cup Holder
  - Emergency Hammer
  - Multifunctional Proportional Handle
  - Emergency Stop Switch
  - Dual Forward/Reverse Shuttle Controls (Steering Column / Joystick)
  - License Plate Light Assembly
- **Power Transmission**
  - 4-Wheel Drive
  - 3 Steering Modes
  - Rear Axle Center Position Display
  - Front Axle Limited-Slip Differential
  - Wet Brake System
  - Outrigger Detection Function
  - Suspension Damping System
- **Electrical System**
  - Torque Limiter
  - Working Envelope Display
  - Joystick Lock
  - Boom-Mounted Work Light
  - Cab Front And Rear Work Lights
  - Seat Belt Unbuckled Alarm
  - Seat Occupancy Sensor/Unoccupied Alert
- **Hydraulic System**
  - Open-Center Load Sensing System
  - Boom Tip Damping System
  - Quick Coupler Pressure Relief
  - Automatic Fork Leveling
- **Others**
  - Safety Rod
  - Rear Tow Hitch

## OPTIONAL CONFIGURATION

- Dual-Rotating Alarm Light (Yellow+Green)
- Air Suspension Leather Seat
- Right Electric Rearview Mirror
- Phone Stand
- Falling Object Protective Structure
- Wheel-Nut Indicators
- Parking Wedge
- Attachment Electrical
- White-Noise Reverse Alarm
- Multi-Circuit Hydraulic System For Attachments
- Hydraulic Quick Coupler
- JCB Q-Fit Quickhitch

## OPTIONAL ATTACHMENTS

- Fork (4t, 1.2m)
- Bucket ($1m^3$; $1m^3$ with teeth)
- Hook (4t)