


Mast Lift-Electric

Item	Metric	
Dimension		
Overall Dimension - Stowed	Length	1390mm
	Width	760mm
	Height	1980mm
Overall Dimension - Transported	Length	1390mm
	Width	760mm
	Height	1980mm
Platform Dimensions	Length	720mm
	Width	760mm
	Height	1130mm
	Platform Extension Distance	520mm
Wheelbase	1070mm	
Min. Ground Clearance (Pothole Protection Deployed/Undeployed)	14/79mm	



Performance	
Maximum Working Height (Indoor)	8m
Max. Platform Height	6m
Max. Lift Capacity	159kg
Max. Platform Occupancy	1
Max. Chassis Allowable Angle	X-3° / Y-1.5°
Machine Weight	1270kg
Driving Speed (Stowed)	4km/h
Driving Speed (Raised Or Extended)	0.8km/h
Min. Turning Radius (Outside)	1550mm
Min. Turning Radius (Inside)	0
Max. Gradeability (Counterweight Uphill)	25% (14°)

Power Source	
Control	24V DC proportional control
Main Power Source - Battery	24V/150Ah
Main Power Source - Charger	24V/15A
Lifting Motor	24V/2.2kW
Traveling Motor	24V/0.6kW
Hydraulic Tank Capacity (Effective Volume)	10L



Tire	
Tire Size	Φ 323mm×100mm
Tire Ground Pressure	6.23kg/cm ²
Driving Wheels	2
Braking Wheels	2
Steering Wheels	2

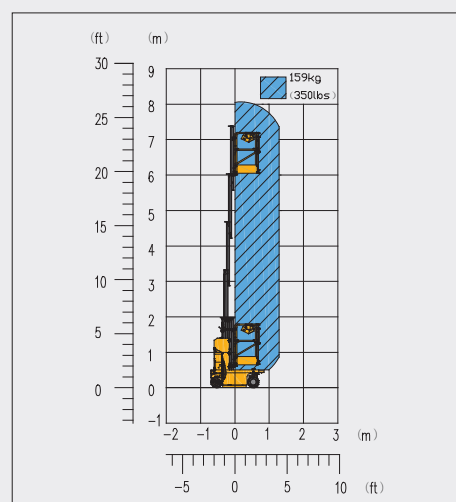

Stowed

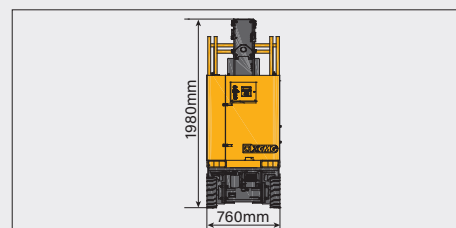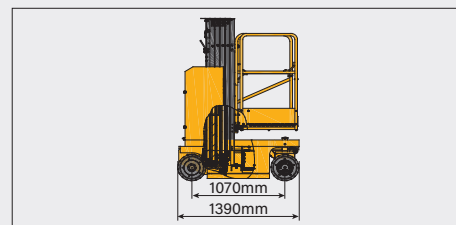

Trans

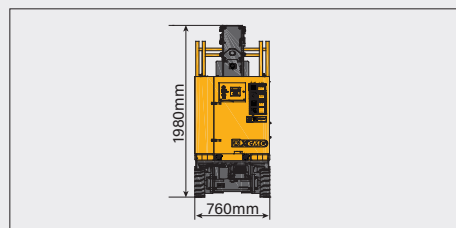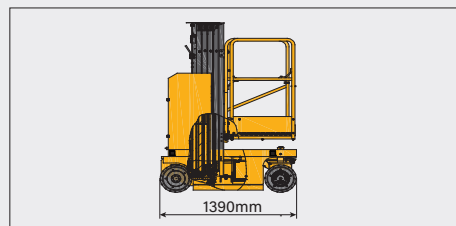



SOLID
TO SUCCEED

MAST LIFT XGR08

Standard configuration

Work Area

- Withdrawable Platform Extension With Position Lock
- Lanyard Attach Points
- Self-Locking Half-Height Swing Gate And Folding Guardrail

Drive

- Front-Wheel Drive

Performance

- Travel Driven By AC Motor
- Full Proportion Travel And Lift Control
- 25 % Gradeability

Power

- DC Maintenance-Free Battery

Applicability

- Lubrication-Free Bearing
- Brake Release For Towing

Safe

- Emergency Stop Devices On Platform And Ground Controls
- Anti-Slipping Metal Platform
- Load Sensing Alarm System
- Descent Alarm
- 3-Second Descent Delay
- Multi-Axis Tilt Sensor
- Multi-Disc Brake
- Auto Brake System
- Pothole Protection Device
- Onboard Diagnostic System
- Electric Horn
- Automatic Speed Reduction At Height
- Charging Protection System

Other Features

- Removable Platform Control
- Intelligent Charger
- Side Fork Pockets
- Flashing Indicator Light
- User-Friendly Control System
- Platform Control With Battery Level Display
- Manual Platform Descent Valve
- Tilt Sensor And Audio Alarm



Working height
8 meters



Lift capacity
159Kg



Electric
power



Optional configuration

- Platform Power
- Air Line To Platform (Option)

XCMG FIRE-FIGHTING SAFETY EQUIPMENT CO., LTD

No.17 Zhujiang East Road, Hi-Tech Development Zone, Xuzhou, Jiangsu, China
mewp@xcmg.com