

XGR26ACJ



SOLID
TO SUCCEED


Mast Lift-Electric

Item	Metric	Imperial
Dimension		
Overall dimension - stowed state	Length	3010mm
	Width	990mm
	Height	2000mm
Overall dimension - transportation	Length	3010mm
	Width	990mm
	Height	2000mm
Platform dimension	Length	850mm
	Width	900mm
	Height	1150mm
Wheelbase	1200mm	3ft11in
Fly jib length	1600mm	5ft 3in
Min. ground clearance	90mm	4in



Performance		
Max. working height	10100mm	33ft2in
Max. platform height	8100mm	26ft7in
Max. lift capacity	200kg	441 lbs
Max. number of occupants	2	
Max. working slope	X-2.5° / Y-2.5°	
Fly jib luffing range	-60°~66°	
Turntable rotation	345°	
Platform rotation	/	
Total weight	3050kg	6724lb
Driving speed (stowed)	5km/h	3.1mph
Driving speed (raised or extended)	0.6km/h	0.37mph
Min. turning radius (inside/outside)	1300mm/2100mm(front)	≤ 4ft3in/ ≤ 6ft11in(front)
	700mm/1700mm (back)	≤ 2ft4in/ ≤ 5ft6in(back)
Turntable tailswing (stowed)	120mm	5in
Max. gradeability	25% (14°)	

Power source		
Control	24 V DC proportional control	
Traveling motor	2 kW/16 V	
Emergency power supply	/	
Main power source - battery	24V/265Ah	
Main power source - charger	24V/36A	
Hydraulic tank capacity	6L	1.6gal

Tire		
Tire size	φ406mm×125mm	φ1ft4in×0ft5in
Tire ground pressure	10.83kg/cm ²	154psi
Driving wheels	2	
Braking wheels	2	
Steering wheels	2	

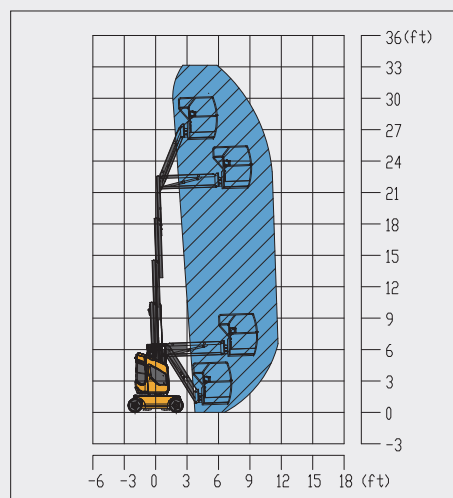

Stowed / Trans

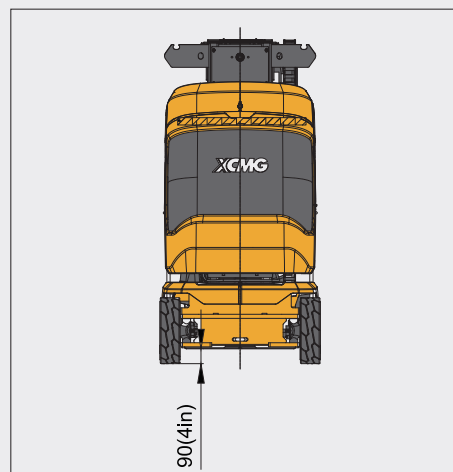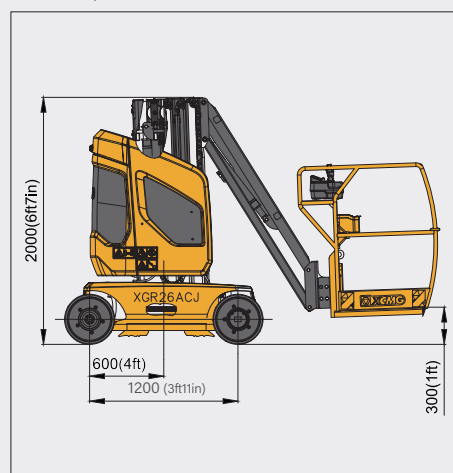

The print does not belong to the contract, nor a part of the commercial contract. We reserve the right to revise the product model, parameters, configuration based on the continuous improvement requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product. The final interpretation rights belong to XCMG.



SOLID
TO SUCCEED

MAST LIFT XGR26ACJ

Standard configuration

- 2-wheel drive
- Lowering and motion alarm
- Tilt alarm
- Horn with adjustable volume
- Emergency stop devices on platform and chassis
- 2-wheel braking system
- Proportional auto leveling system
- Proportional joystick control
- Drive enable
- Full-time positive traction drive
- Telematics front-end interace
- Anti-entrapment protection device
- Hostile environment package
- Thumb rocker steering



Working height
33ft2in



Lift capacity
441 lbs



Electric
power



Optional configuration

- Working light assembly
- Platform air line

XCMG FIRE-FIGHTING SAFETY EQUIPMENT CO.,LTD

No.17 Zhujiang East Road, Hi-Tech Development Zone, Xuzhou, Jiangsu, China
mewp@xcmg.com