XCMG | SOLID TO SUCCEED

CE

SCISSOR LIFT
XG0608C

Standard configuration

Work Area
- Withdrawable Platform Extension With Position Lock
- Lanyard Attach Points
- Self-Locking Half-Height Swing Gate And Folding Guardrail

Drive
- Rear-Wheel Drive

Performance
- Travel Driven By AC Motor
- Full Proportion Travel And Lift Control
- 25 % Gradeability

Power
- DC Maintenance-Free Battery

Applicability
- Lubrication-Free Bearing
- Brake Release For Towing

Safe
- Emergency Stop Devices On Platform And Ground Controls
- Anti-Slipping Metal Platform
- Load Sensing Alarm System
- Descent Alarm
- 3-Second Descent Delay
- Multi-Axis Tilt Sensor
- Boom Maintenance Lock
- Auto Brake System
- Fault Diagnosis System
- Electric Horn
- No Traveling With Platform Elevated
- Charging Protection System

Other Features
- Removable Platform Control
- Intelligent Charger
- Hourmeter
- Side Forklift Pockets For Transportation
- Flashing Indicator Light
- User-Friendly Control System
- Platform Control With Battery Level Display
- Manual Platform Descent Valve
- Tilt Sensor And Audio Alarm
- White Rubber Track



Working height
6.5/0 meters

Lift capacity
200Kg

Electric
power



Optional configuration

- Platform Searchlight
- Platform External Power Supply
- Air Line
- Platform Fire Extinguisher
- Platform Foot Pedal
- Black Rubber Track

XCMG FIRE-FIGHTING SAFETY EQUIPMENT CO., LTD

No.17 Zhujiang East Road, Hi-Tech Development Zone, Xuzhou, Jiangsu, China
mewp@xcmg.com


XG0608C


XCMG SOLID TO SUCCEED

Scissor Lift-Electric


Item	Metric
Dimension	
Max. Working Height (Indoor/Outdoor)	6.5/0m
Max. Platform Height (Indoor/Outdoor)	4.5/0m
Min. Platform Height	0.9m
Max. Platform Drive Height	0.9m
Overall Length (Without Ladder/Outriggers)	1535(1432)mm
Overall Width	790mm
Overall Height (Platform Folded)	2016(1654)mm
Platform Length	1309mm
Platform Width	702mm
Platform Extension Length	550mm
Min. Ground Clearance	70mm
Track Dimension	C150×72H×43
Performance	
Rated Load	200kg
Load On Platform Extension	115kg
Max. Platform Occupancy (Indoor/Outdoor)	1/0
Max. Driving Speed (Stowed)	2.0km/h
Max. Driving Speed (Raised)	0km/h
Max. Gradeability	25%
Min. Turning Radius (Inside)	0m
Min. Turning Radius (Outside)	1.7m
Platform Raising Time	20-28s
Platform Lowering Time	27-39s
Max. Working Slope (Side To Side/Front And Rear)	1.7°/1.7°
Tire Ground Pressure	0.341kgf/cm^2
Driving Wheels	2
Braking Wheels	2
Steering Wheels	Zero-Turn Steering
Power Source	**Maintenance-free lead-acid batteries**
Battery Voltage	24V
Battery Capacity (3HR)	100Ah
Battery Charger	24/15V/A
Traveling Motor	0.7/16kW/V
Lifting Motor	1.3/24kW/V
Hydraulic Oil Capacity	
Hydraulic Tank Capacity	4L
Weight	
Machine Weight	900kg

Trans

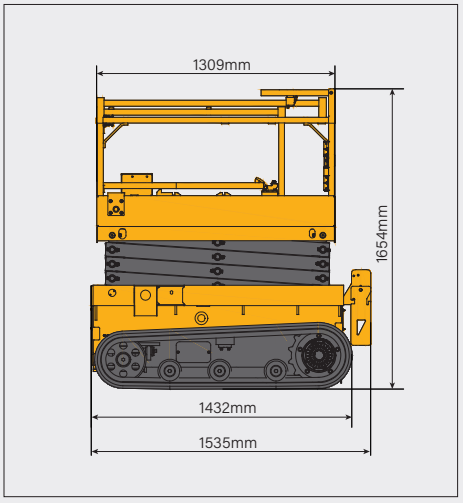

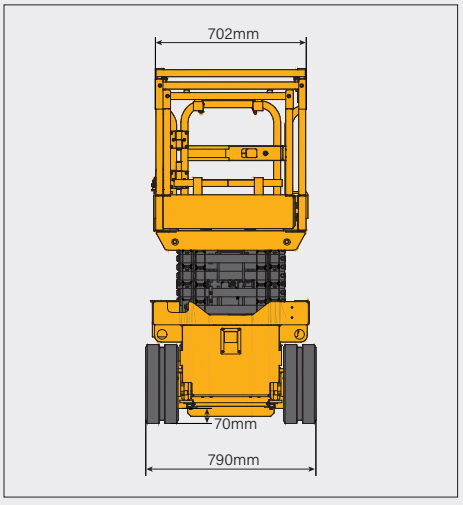

Platform Extd

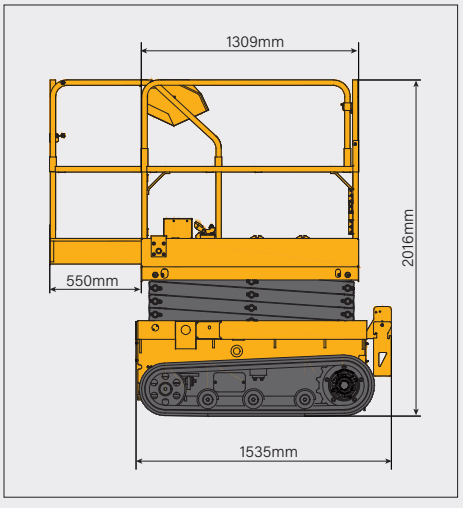

The print does not belong to the contract, nor a part of the commercial contract.We reserve the right to revise the product model, parameters, configuration based on the continuous improvment requirements of the product, without prior notice.Pictures are for reference only, and the specific product shall depend on the real product.The final interpretation rights belong to XCMG.