

XAP165



XAP165

Asphalt Mixing Plant

XAP165 Asphalt mixing plant is an international advanced product developed independently by XCMG for producing asphalt mixture, modified asphalt mixture, etc., fully meet the requirements of projects on classified road, municipal road and freight yard.

Performance and characteristics


- Variable frequency speed regulation of feeding machine, stepless speed control of aggregate and recycled material feeding amount, and has the functions of material breakage detection and alarm.
- The hopper and feeding belt conveyor are equipped with grids for removing oversized materials to prevent them from entering the drum and causing damage to the equipment.
- The cold material feeding system is equipped with an emergency stop device, the sand hopper is equipped with a vibra-

tion arch breaking device, and the aggregate and feeding belt conveyors are equipped with tensioning, self-cleaning, and anti-deviation devices.

- Waterfall type material curtain, heat exchange efficiency 92%.
- The drum is made of heat-resistant and wear-resistant manganese steel, which has minimal deformation when heated and is durable; Aluminum silicate cotton (non-toxic and pollution-free) insulation, covered with stainless steel plate.

Dimension in working configuration

Unit: mm

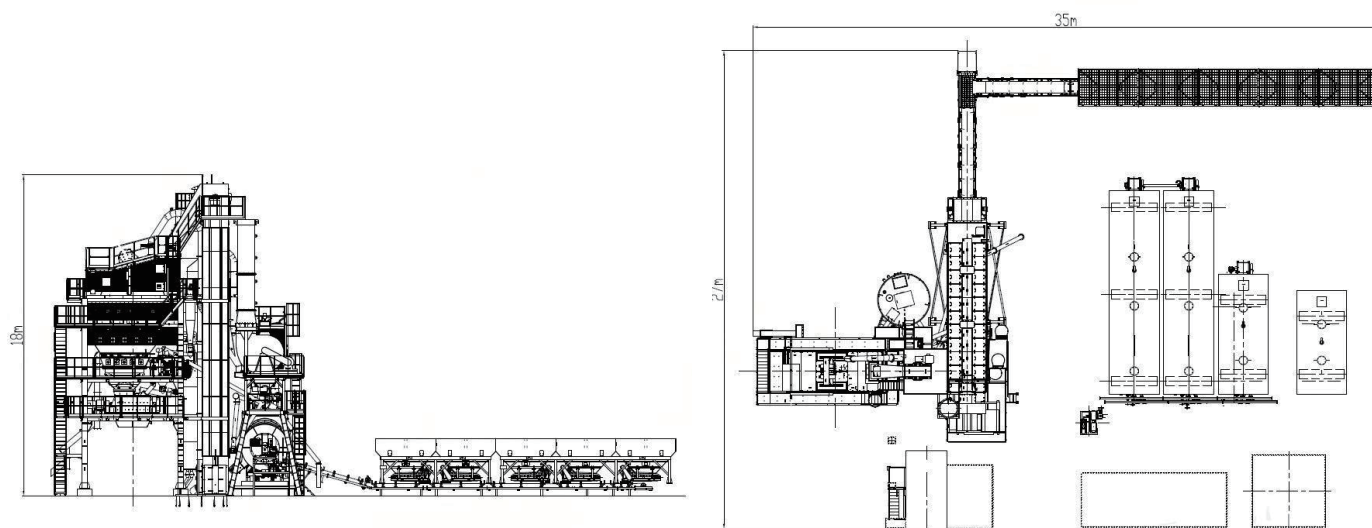

Main specifications

Item		Unit	Parameter	
Whole machine	Rated productivity	t/h	160	
	Nominal mixing capacity	kg/batch	2200	
	Required operating power	kW	450	
	Maximum single unit power	kW	110	
	Minimum installation area	m ²	945(35m×27m)	
Item		Unit	Spec.	Q'ty
Cold hoppe	Single hopper capacity	m ³	9	5set
	Loading height	m	2.9	
	Loading width	m	3.3	
	Arch-breaking device	-	Vibrating type of arch breaking	1set

Notes:

Specifications and configurations may vary depending on options and regional regulations. XCMG reserves the right to make changes to specifications without prior notice.



XCMG ROAD MACHINERY BUSINESS
Email: road.marketing@xcmg.com



Official Website



Facebook



Youtube