



SOLID
TO SUCCEED



ARTICULATED BOOM LIFT XGA20K

Standard configuration

Work Area

- Tri-Entry Platform With Side Swing Gate

Power

- Cold Start Components
- Engine Intake Air Pre-Filter Assembly
- Engine Condition Monitoring And Start Protection Device

Drive

- 4-Wheel Drive
- Axle Oscillation

Safe

- Descent And Motion Alarm
- Tilt Alarm
- Horn With Adjustable Volume
- Overload Alarm
- Emergency Stop Devices On Platform And Chassis
- Emergency Power Unit
- Axle Oscillation Pressure Detection System
- 4-Wheel Braking System

Other Features

- Automatic Leveling System
- Proportional Joystick Control
- Drive Enable
- Two-Speed Drive
- Telematics Front-End Interface
- Hostile Environment Package
- Thumb Rocker Steering
- Double-Load Amplitude Control
- Anti-Entrapment System
- Platform Power
- Tool Tray



Working height
20.63 meters



Lift capacity
256/350kg



Diesel
power



Optional configuration

- Solid Tires (ϕ 915mm $\times$ 326mm)
- Foam-Filled Tires (Φ 936mm $\times$ 360mm)
- Hydraulic Generator
- Air Line
- Mechanical Anti-Entrapment Device
- Platform Height Limitation Anti-Collision Device
- Platform Half-Mesh
- Working Light Assembly
- Fall Arrest Assembly
- Platform Anti-Squeeze Auxiliary Rail
- Aircraft Protection Device
- Rubber Protective Guard

XCMG FIRE-FIGHTING SAFETY EQUIPMENT CO., LTD

No.17 Zhujiang East Road, Hi-Tech Development Zone, Xuzhou, Jiangsu, China
mewp@xcmg.com

XGA20K



SOLID
TO SUCCEED


Articulated Boom Lift-Engine Powered

Item	Metric	
Dimension		
Overall Dimension - Stowed	Length	8520mm
	Width	2300mm
	Height	2430mm
Overall Dimension - Transported	Length	6300mm
	Width	2300mm
	Height	3000mm
Platform Dimensions	Length	1830mm
	Width	760mm
	Height	1150mm
Wheelbase		2500mm
Jib Length		1850mm
Min. Ground Clearance		330mm



Performance	
Max. Working Height	20.63m
Max. Platform Height	18.63m
Max. Outreach	12.08m
Max. Up And Over Clearance	8m
Max. Lift Capacity	256/350kg
Max. Platform Occupancy	2/3
Max. Chassis Allowable Angle	X-5° / Y-5°
1st Boom Luffing Range	0~72°
2nd Boom Luffing Range	0~73°
Fly Boom Luffing Range	-65~70°
Turntable Rotation	360°
Platform Rotation	160°
Machine Weight	10500kg
Driving Speed (Stowed)	5.5km/h
Driving Speed (Raised or Extended)	0.6km/h
Min. Turning Radius (Inside/Outside)	3200/5000mm
Turntable Tailswing (Stowed)	540mm
Max. Gradeability (Counterweight Downhill)	45% (24°)

Power source	
Control	12 V DC proportional control
Emergency Power Supply	12V/110Ah
Engine Model	Kubota V2403-CR-EW02
Engine Power / Rpm	36.8kW/(2700r/min)
Max. Engine Torque	157.4N · m(1600r/min)
Engine Emission Standard	EU V
Hydraulic Tank Capacity (Effective Volume)	105L
Fuel Tank Capacity	90L



Tire	
Tire Size	φ936 mm×360 mm
Ply Rating Of Tire	14
Tire Ground Pressure	8.29 kg/cm ²
Driving Wheels	4
Braking Wheels	4
Steering Wheels	2

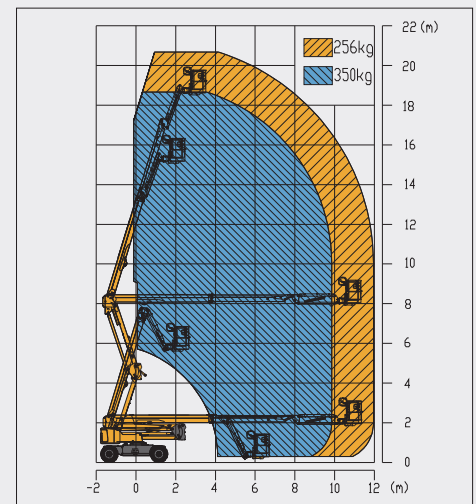

Stowed

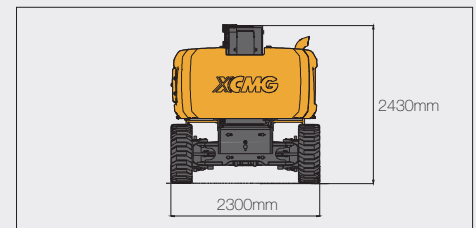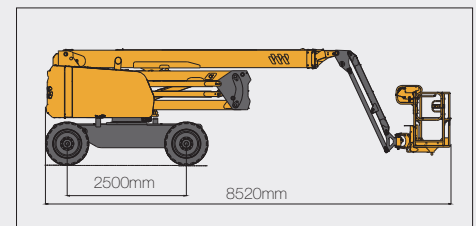

Trans

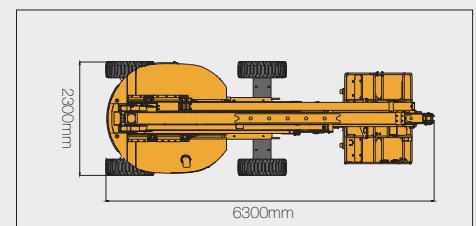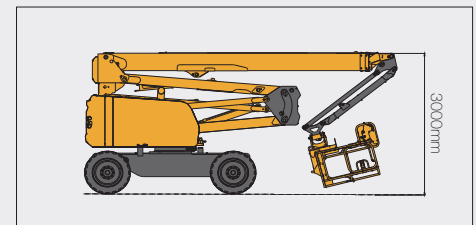

The print does not belong to the contract, nor a part of the commercial contract. We reserve the right to revise the product model, parameters, configuration based on the continuous improvement requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product. The final interpretation rights belong to XCMG.