
XCMG SOLID TO SUCCEED


TELEHANDLERS


XT3514K




LOAD CHART

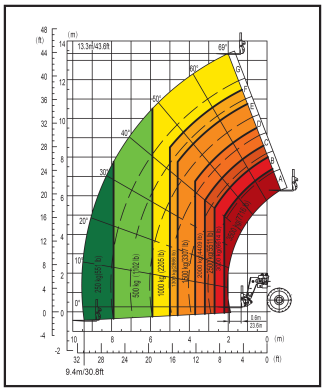

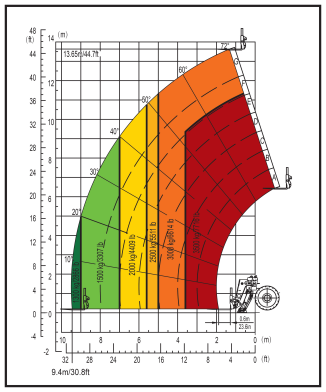

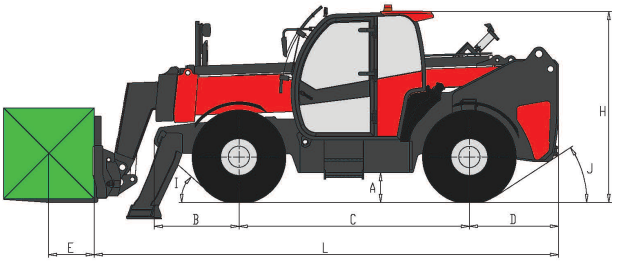

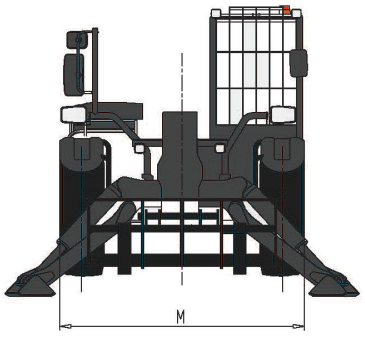

STATIC DIMENSION

Dimensions		Metric
Min. Ground Clearance	A	370mm
Front Overhang	B	1120mm
Wheel Base	C	3050mm
Rear Overhang	D	1205mm
Load Center Distance	E	600mm
Overall Length	L	6160mm
Overall Height	H	2550mm
Overall Width	M	2420mm
Approach Angle	I	40°
Departure Angle	J	33°

XT3514K

PARAMETER

Parameter	Metric
Dimension	
Overall Length	6160mm
Overall Width	2420mm
Overall Height	2550mm
Wheel Base	3050mm
Track Width	1960mm
Min. Ground Clearance	370 mm
Fork Dimensions	1200×122×50mm
Weight and tires	
Machine Weight (With Fork)	11000 kg
Tire Specification	400/80-R24
Performance	
Rated Load	3500kg
Load Center Distance	600mm
Max. Lifting Height (To Upper Plane Of Forks)	13.7m
Lift Capacity At Max. Lifting Height	3000kg
Max. Outreach (Boom Being Horizontal, Load Center Distance To The Front End Of Tires)	9.4m
Lift Capacity At Max. Outreach	1300kg
Boom Lifting Time	≤16s
Boom Lowering Time	≤13s
Boom Extension Time	≤17s
Boom Retraction Time	≤12s
Fork Dump Time	≤5s
Fork Crowd Time	≤4s
Boom Lifting Range	-3°～72°
Fork Tilt Angle Range (Boom Being Horizontal)	-12°～114°
Max. Travel Speed	≥27 km/h
Max. Traction Force	≥60kN
Min. Turning Radius	≤4200 mm
Frame Leveling Angle	±10°
Power System	
Power Source	Diesel Engine
Engine Brand/Model	DEUTZ BF4M2012
Number Of Cylinders	4
Engine Rated Power	72kW
Emissions	Stage III
Rated Speed	2200r/min
Max. Torque @ Rpm	375N.m@1600RPM
Fuel Tank Capacity	135L
Transmission System	
Numbers Of Gears (Forward/Reverse)	2/2
Transmission Type	Hydrostatic Transmission
Steer Mode	4-Wheel Steer
Drive Mode	4×4
Hydraulic System	
Hydraulic Pump Type	Plunger Pump
Hydraulic System Pressure	28Mpa
Hydraulic System Flow	150L/min
Hydraulic Tank Capacity	158L

STANDARD CONFIGURATION

- **Cab**
- FOPS And ROPS Certification
- Air Conditioning
- Adjustable Steering Wheel
- 7-Inch Main Display
- Radio
- 12 V Power Outlet
- Top Sun Visor
- Interior Rearview Mirror
- Exterior Rearview Mirror
- Reversing Camera
- Front Wiper
- Rear Wiper
- Top Wiper
- Fire Extinguisher
- Revolving Alarm Light
- Adjustable Suspension Seat
- Emergency Hammer
- Emergency Stop Switch
- Cup Holder
- Reversing Buzzer
- Multifunctional Proportional Handle
- Seat Belt Unfastened Detection Function
- **Power Transmission**
- 4-Wheel Drive
- 3 Steering Modes
- Rear Axle Center Position Display
- Front Axle Limited-Slip Differential
- Outrigger Position Detection Function
- Wet Brake System
- Engine Inlet Heating
- **Electrical System**
- Torque Limiter
- Working Envelope Display
- Boom-Mounted Work Light
- Cab Front And Rear Work Lights
- Seat Belt Unbuckled Alarm
- **Hydraulic System**
- Open-Center Load Sensing System
- Boom Tip Damping System
- Automatic Fork Leveling
- **Others**
- Fan Reverse Dust Removal
- Safety Rod
- Manual Towing Hook

OPTIONAL CONFIGURATION

- Front Falling Object Guard
- Phone Stand
- Foam-Filled Tires
- Attachment Electrical

OPTIONAL ATTACHMENTS

- Fork（3.5t,1.2m)
- Bucket
- Hook
- Brick Clamp
- Bale Clamp (Soft)
- Log Clamp
- Snow Plow Blade
- Angled Sweeper